

ALZMETALL
we drive productivity



MACHINING CENTER **GS 1400**

www.alzmetall.com

CONTENT

1	COVER PAGE
2	ALZMETALL - COMPANY INTRODUCTION
3	AT A GLANCE
	– Highlights
	– Focus on operators needs
	– User benefits
4	ALZMETALL - THE CONCEPT
	– Cross Sectional Views of Machine
5	RESEARCH AND DEVELOPMENT
	– Finite-Elements-Method (FEM)
	– Multi-Elements-Simulation
	– Modal-Analysis
6	BASIC DESIGN
7	ALZMETALL - SPECIFIC - GANTRY - CONCEPT (ASGK)
	– Convetional and modified Gantry-Designs
8	TRAVEL-SYSTEM-CARRIAGE
	– Design Characteristics
9	NC-SWIVEL-AND-ROTARY-TABLE (SDK)
10	WORKPIECE DIMENSIONS - MACHINING SPACE
11	OPTIONS
	– Rotary-Table C-Axis Selection
15	TECHNICAL DATA
16	MOTOR - SPINDLES
	– RPM - POWER - TORQUE TRACK RECORD
17	MACHINING CENTER DIMENSIONS
18	AUTOMATION SOLUTIONS
20	PRODUCT RANGE
	– Company Address

EXPLANATIONS/ABBREVIATIONS

AF	Air Foil
ASGK	ALZMETALL-Specific-Gantry-Concept
CDF	Cycle Duration Factor
FEM	Finite Elements Method
FDT	Milling – Turning – Torque-Drive
GS	Gantry Standard
GX	Gantry Special Execution
KGT	Ballscrew-Drive
LOB	Laser Surface Machining/Treatment
NPS	Zero Point Clamping System
SDK	NC-Swivel-and-Rotary-Table
T	Torque-Drive
TCO	Total Cost of Ownership
TCP	Tool Center Point
WN	ALZMETALL – Standard Specification

COMPANY INTRODUCTION



ALZMETALL is a company with an international reputation and global activities. For more than seven decades we have been the leader in technology for drilling, milling and casting. Alzmetall products have proven themselves in general machining applications, in the automotive industry, in mould and die business, at the aerospace sector, as well as in many mid-size mechanical engineering enterprises. Our experience is based on over 220.000 machines supplied.

We focus on precision, performance and Quality for all our products. With our own foundry we do not only produce grey cast iron and spheroidal grey cast iron for our own machines, but also are supplier to the machine tool manufacturers and customers worldwide.


Our open company culture encourages innovation and performance by a continuous innovation towards High Tech and customer benefit for added value.

Developing the GS-series, we offer highly dynamic and extremely rigid machining centers according to our pretensions: „we drive productivity“.

ALZMETALL is holding its own Sales and Service associated Company in China.

ALZMETALL Machine Tools (Taicang) Co., Ltd.,
Dong Ting Building, Room 1612, No 319,
Middle Zheng He Road, 215400 Taicang, Jiangsu Province.

奥美特机床(太仓)有限公司
地址: 江苏省太仓市郑和中路319号兰德东亭大厦德国中心1612室, 邮编: 215400
sales-support@alzmetall.cn

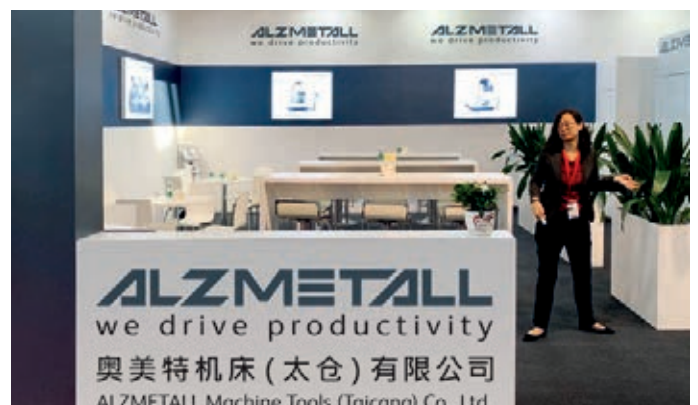

AT A GLANCE

Machining Center with options: chip conveyor, cooling unit, coolant filter and mist extraction unit. These options are either to be installed along the right - or left side of the Machining Center.



5-Axes Machining Center GS 1400/5-FDT

HIGHLIGHTS

- Alzmetall-Specific-Gantry-Concept (ASGK)
- Grey Cast Iron and Spheroidal Graphite Cast Iron Machine Body and Frame components
- Travel-System-Carriage with incorporated Box-in-Box-System - patented
- 4-fold Linear Guidance for Travel-System-Carriage and Z-Axis with integrated Motor-Spindle
- 3-fold Torque-Drives for Swivel-Axis (A-Axis) and Rotary-Axis (C-Axis)
- Hybrid-Machining-Applications such as: Drilling/Milling/Turning and Grinding at one Clamping-Set-Up
- Up to 3000 kg workpiece weight including Clamping-Set-Up-Device

FOCUS ON OPERATORS NEEDS

- Access to Machine-Table on Operator level
- Working-Space access from top, loading by crane possible
- Mist extraction directly at Machine-Table
- Chip tunnel straight below Machine-Table
- Working-Space flushing with coolant (option)
- Automatic Access-Door feature open/close (option)
- Access to all maintenance units at working height

USER BENEFITS

Streamlined Force-Circuit between workpiece and Cutting-Tool in addition to geometrical and symmetrical configuration of the Carriage-Travel-System.

➤ Performing

- Thermal consistency at Tool Center Point (TCP) at X-Y- level without additional Axes compensation
- Significant reduction of Cutting-Tool costs





➤ Optimized

- Contour consistency at highest path velocity
- Lifetime of Motor-Spindle

➤ Guaranteed Benefits


- Extremely high Parallel-Path-Precision through two Servo-Drives at each X-, Y-, and Z-Axis
- Considerably reduced Total Cost of Ownership (TCO) over lifetime period of Machining Center

ALZMETALL - THE CONCEPT

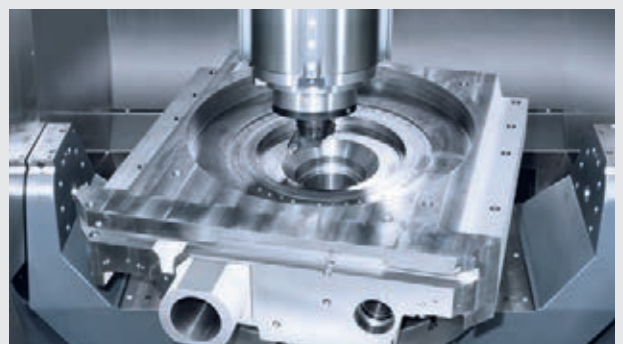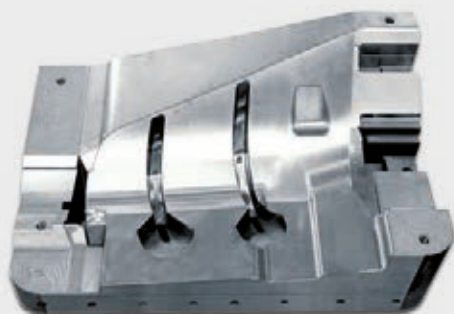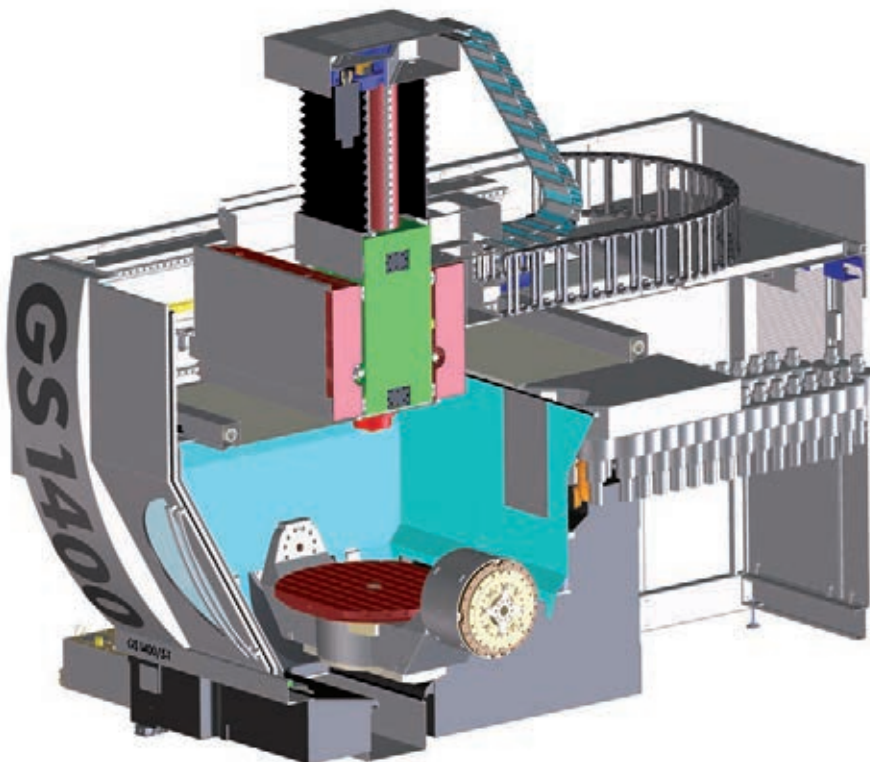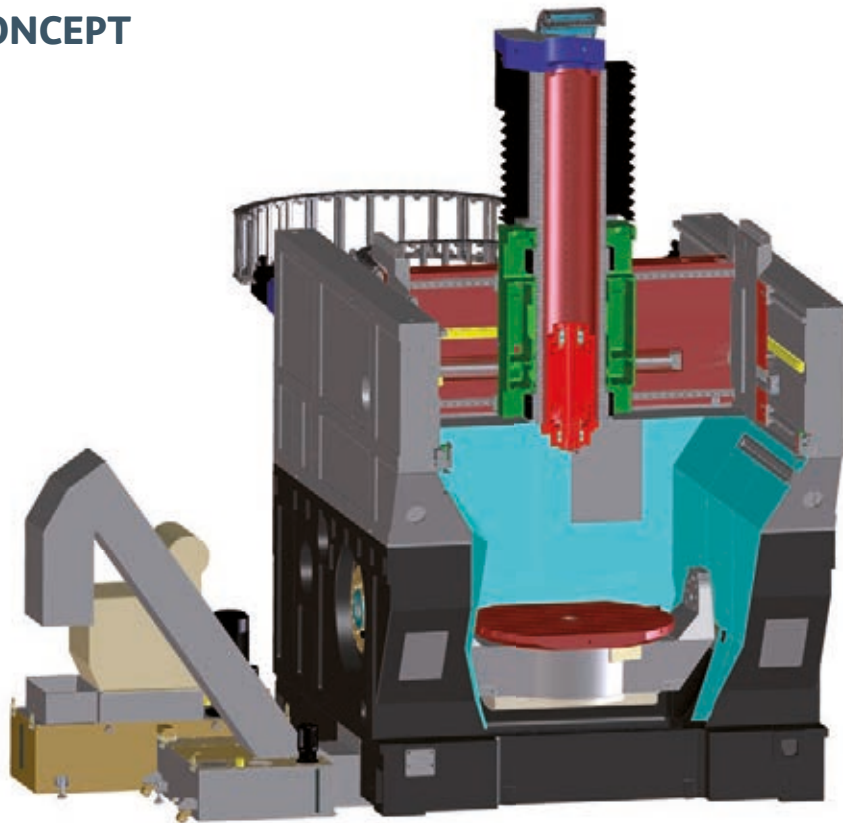

RESEARCH AND DEVELOPMENT

DEVELOPMENT BY USING FINITE-ELEMENTS-METHOD (FEM)

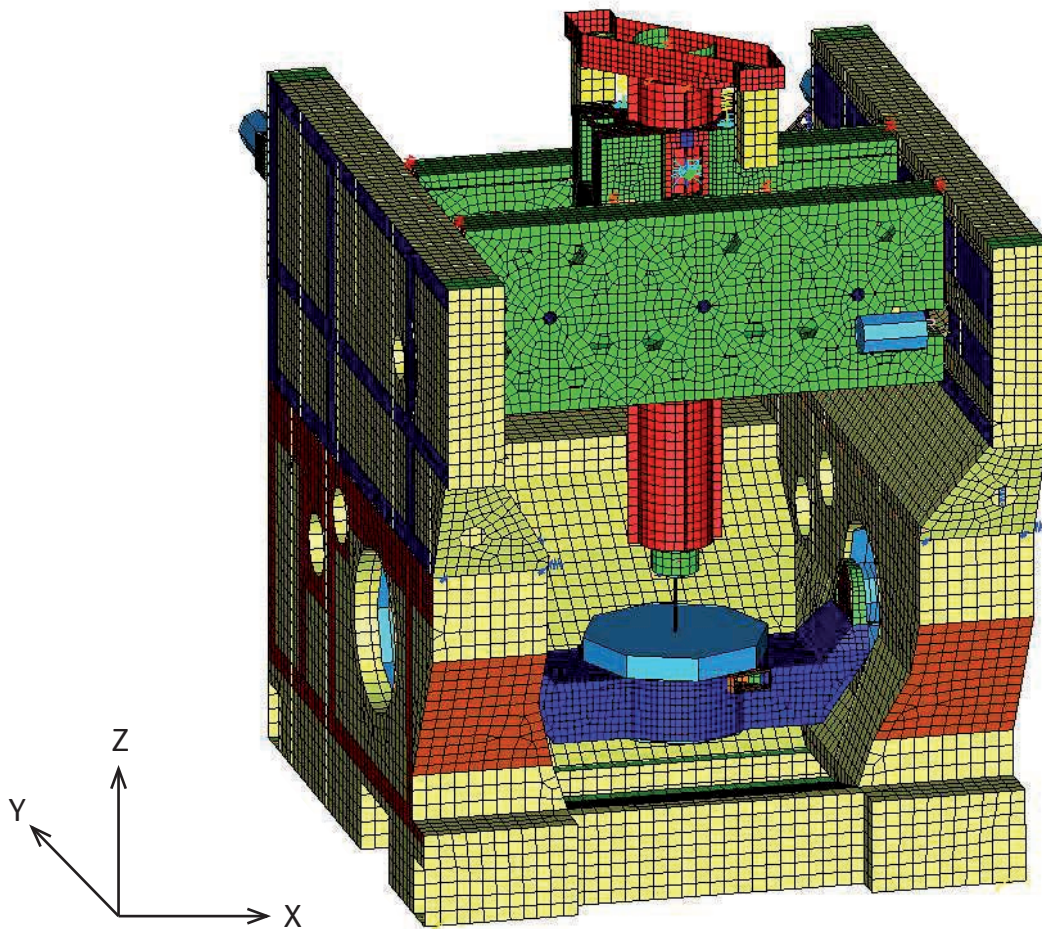

FEM generated Structural Model - Point of force-input at TCP and simultaneously at Machine-Table

DEVELOPMENT

The „Finite-Elements-Method“ was applied to obtain the desired static and dynamic characteristics of each individual part of the machine and to investigate the collective rigidity of the Machining Center.

MULTI-ELEMENTS-SIMULATION

During the development process the Finite-Elements-Method was already applied by building the structure of the machine, patterned from the 3D-Volume-Model born from CAD to simulate vibration characteristics. Thus enabling engineers to determine the optimal dynamic rigidity of the machine under terms and conditions of the daily use at the shop floor.


MODAL-ANALYSIS

Results gained by the Multi-Elements-Simulation of entire machine structure and design had to be confirmed at the prototype of the GS-Machining Center by using the Modal-Analysis. The experimental Modal-Analysis procedure is being used to realize and demonstrate the quality of the dynamic machine characteristics under production conditions.

The final test of the Modal-Analysis accomplished at ALZMETALL verified the high degree of performance of the dynamic requirements in reality. Thus the ALZMETALL GS-Series offers comparable Best-in-Class conditions for high dynamic machining applications.



BASIC DESIGN

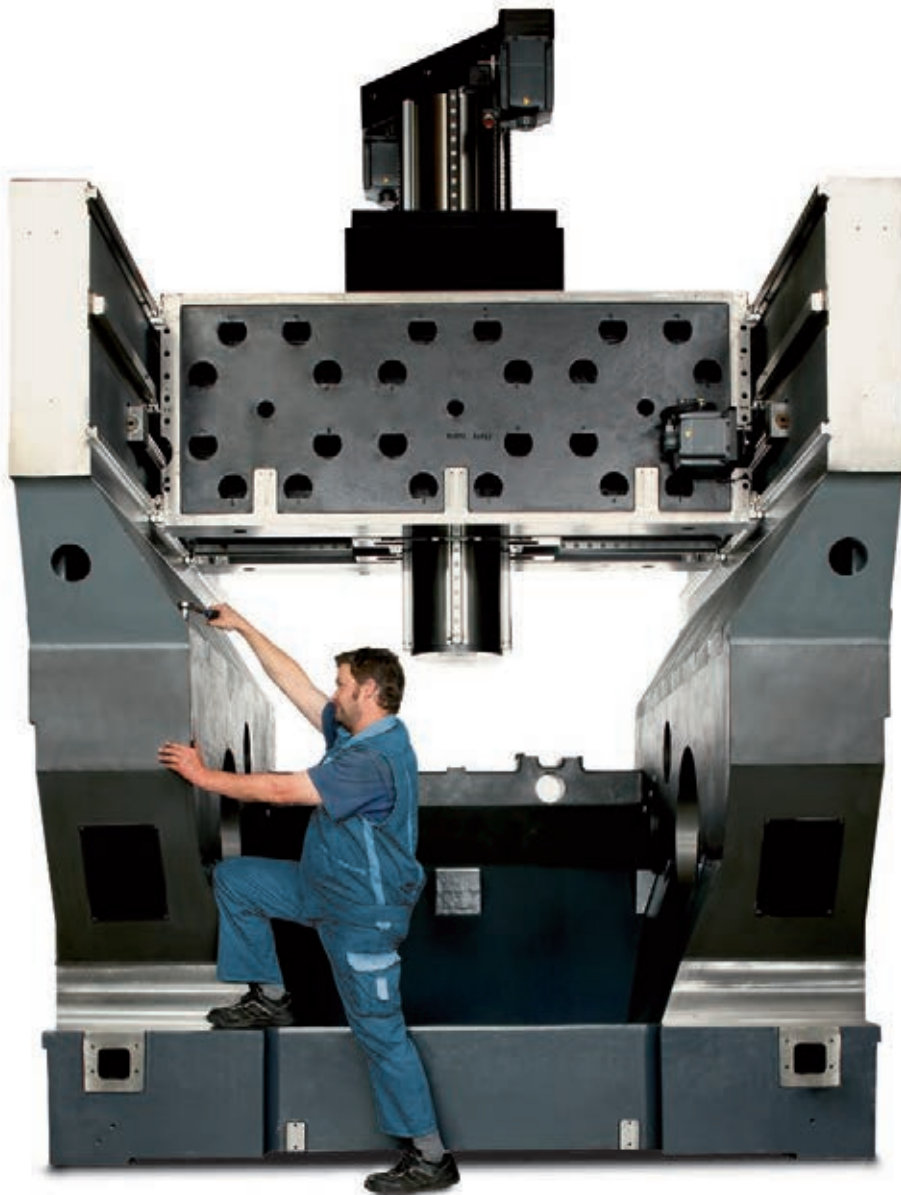

„THINK BIG“ WHEN MILLING AND TURNING

Extreme rigid, Integral-Basic-Body prepared to be fitted with:

- Frame Side Walls as carrier for X, Y and Z Axes
- NC – Swivel- and Rotary-Table (A- and C- Axis)
- Chain tool magazin with 33, [45], [63], [66], [75], [90], [126] [150] tool positions [option]

- Rack-Type magazine with [224] or [250] tool positions [option]

All statically stressed Basic-Machine-Parts made from grey cast iron and all dynamically stressed Basic-Machine-Parts and components made from spheroidal cast iron.




ALZMETAL - SPECIFIC -GANTRY - CONCEPT (ASGK)

– patented –

ALZMETALL-SPECIFIC- GANTRY-CONCEPT (ASGK)



In comparison to Gantry-Designs:

- 4-fold internal linear guidance systems
- ➔ Deviation (Deflection) reduced by factor 2.3 delivers
- ➔ Rigidity increased by factor 2.3 versus “On-Top-mounted” Linear Guidance Systems
- ➔ Less Position Deviation at TCP at the same level of Acceleration
- ➔ Significant increase of Cutting-Tool lifetime

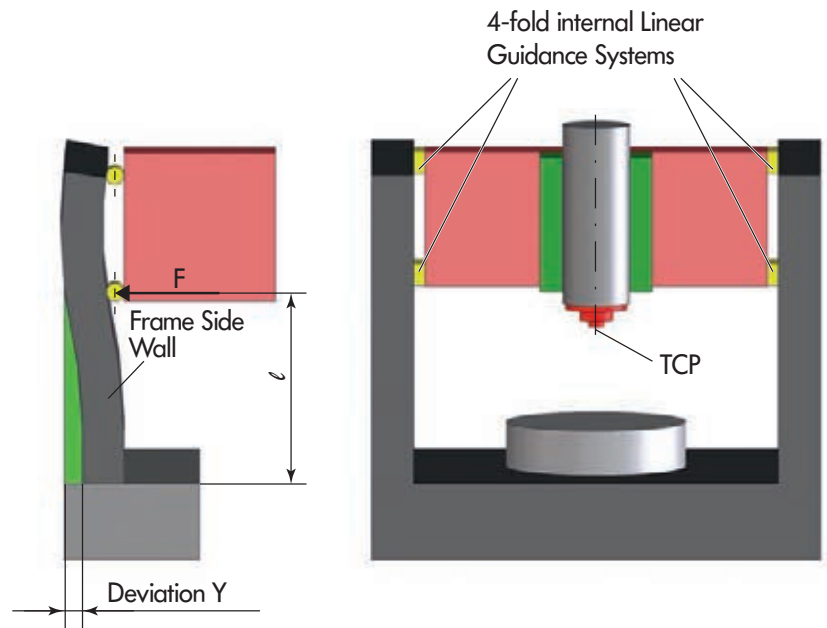

CONVENTIONAL AND MODIFIED GANTRY-DESIGNS

- 2 On-Top-mounted Linear Guidance Systems
- Deviation (Deflection) of Frame Side Walls increased by factor 2.3


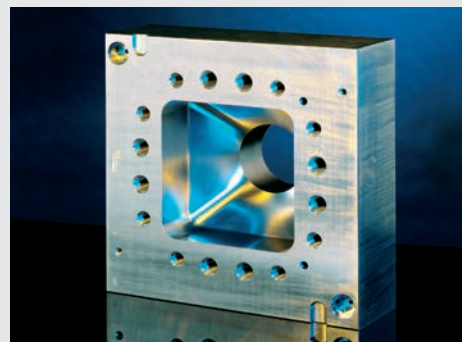
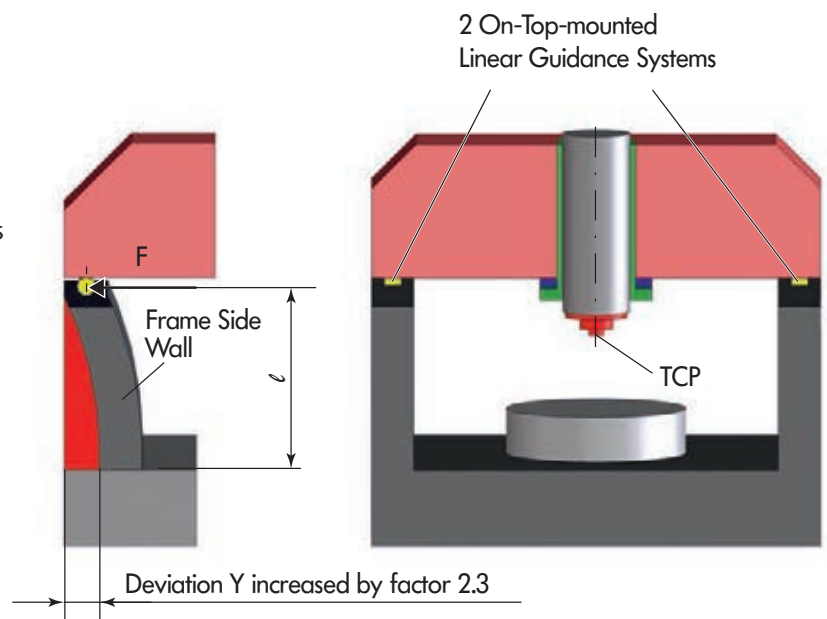


TRAVEL - SYSTEM - CARRIAGE

DESIGN CHARACTERISTICS

Box-in-Box-System:



- Frame Side Walls as static basic structure. Therein embedded two X-Axes-Carrier with integrated Z-Axis Monobloc
- Dynamically stressed Basic-Machine-Parts and components made from EN-GJS 500 (GGG 50)
- All 3 Linear-Axes (X/Y/Z) are 4-fold guided with 8 guiding elements each.
- All 3 Linear-Axes (X/Y/Z) are each driven by 2 Ballscrews and 2 Servo-Drives
- ➔ Excellent Axes dynamics
- ➔ Cutting edge Parallel-Path-Precision
- ➔ Thermal stability due to geometrical symmetry with Thermo-Symmetric Machine construction

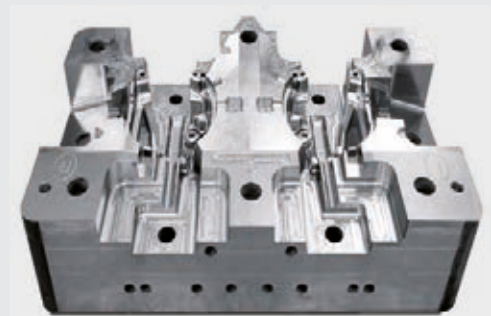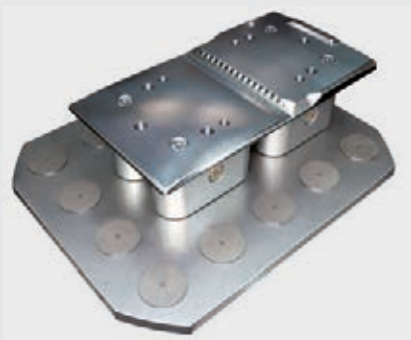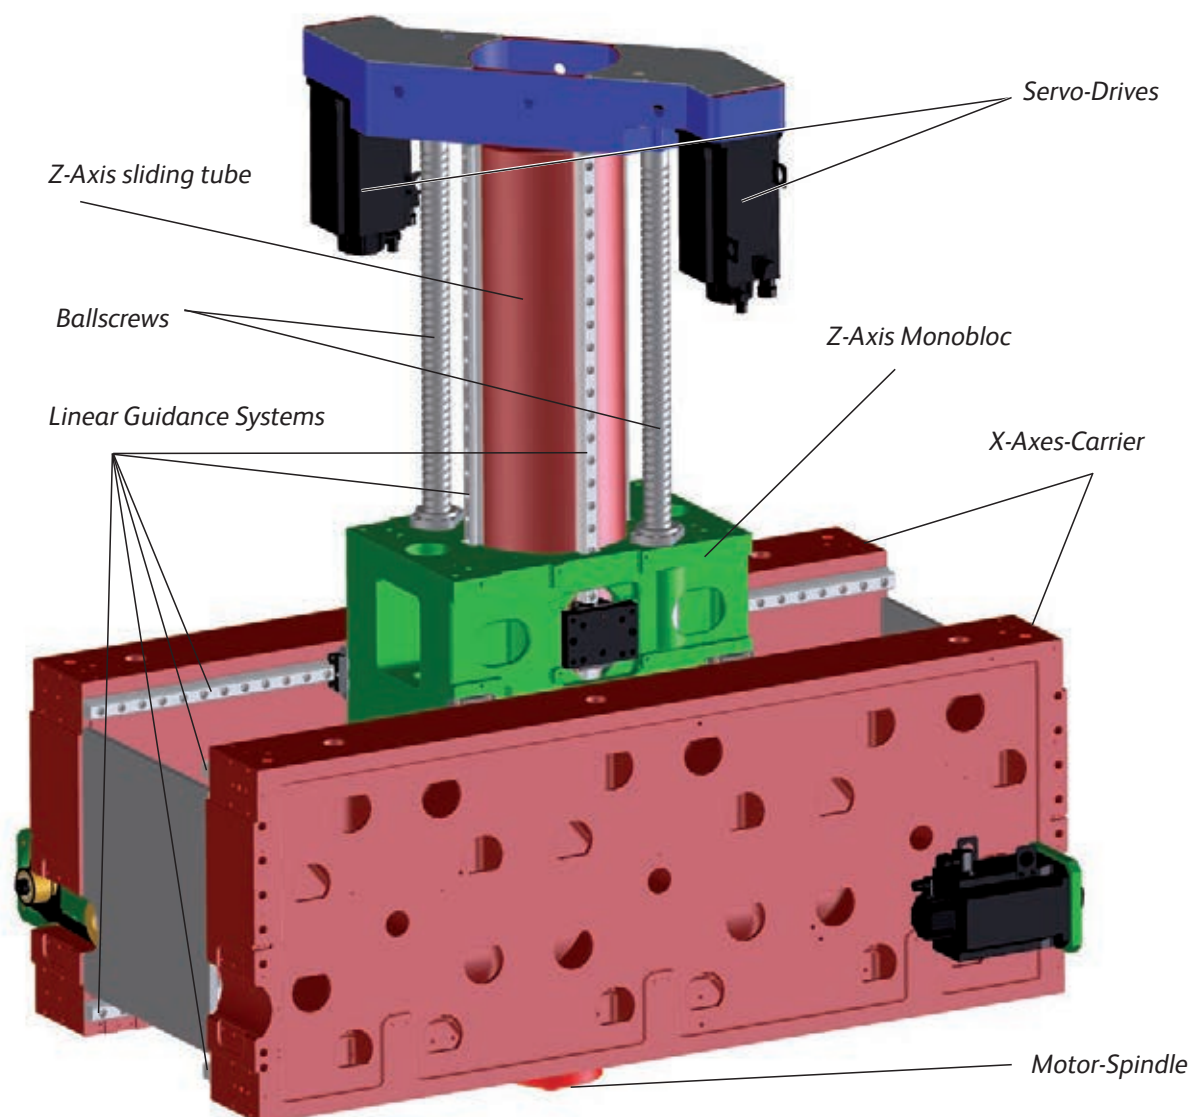

NC - SWIVEL - AND - ROTARY - TABLE (SDK)

SWIVEL- (A-AXIS) AND ROTARY- (C-AXIS) UNIT


- Direct Rotary Drives (Torque-Motors) for high dynamic and oscillating Machining – maintenance free –
- Internal Torque-Motor at each Frame side wall as NC-Swivel-Axis (A-Axis) – patented-
- NC-Rotary-Table (C-Axis) equipped with Torque-Motor
- Highest swivel and rotational speed with outstanding control quality
- Higher accuracies – no mechanical backlash
- Elimination of friction at Drive-Components
- Wear – and maintenance free delivers reduced Total Cost of Ownership (TCO) over lifetime period of Machining Center

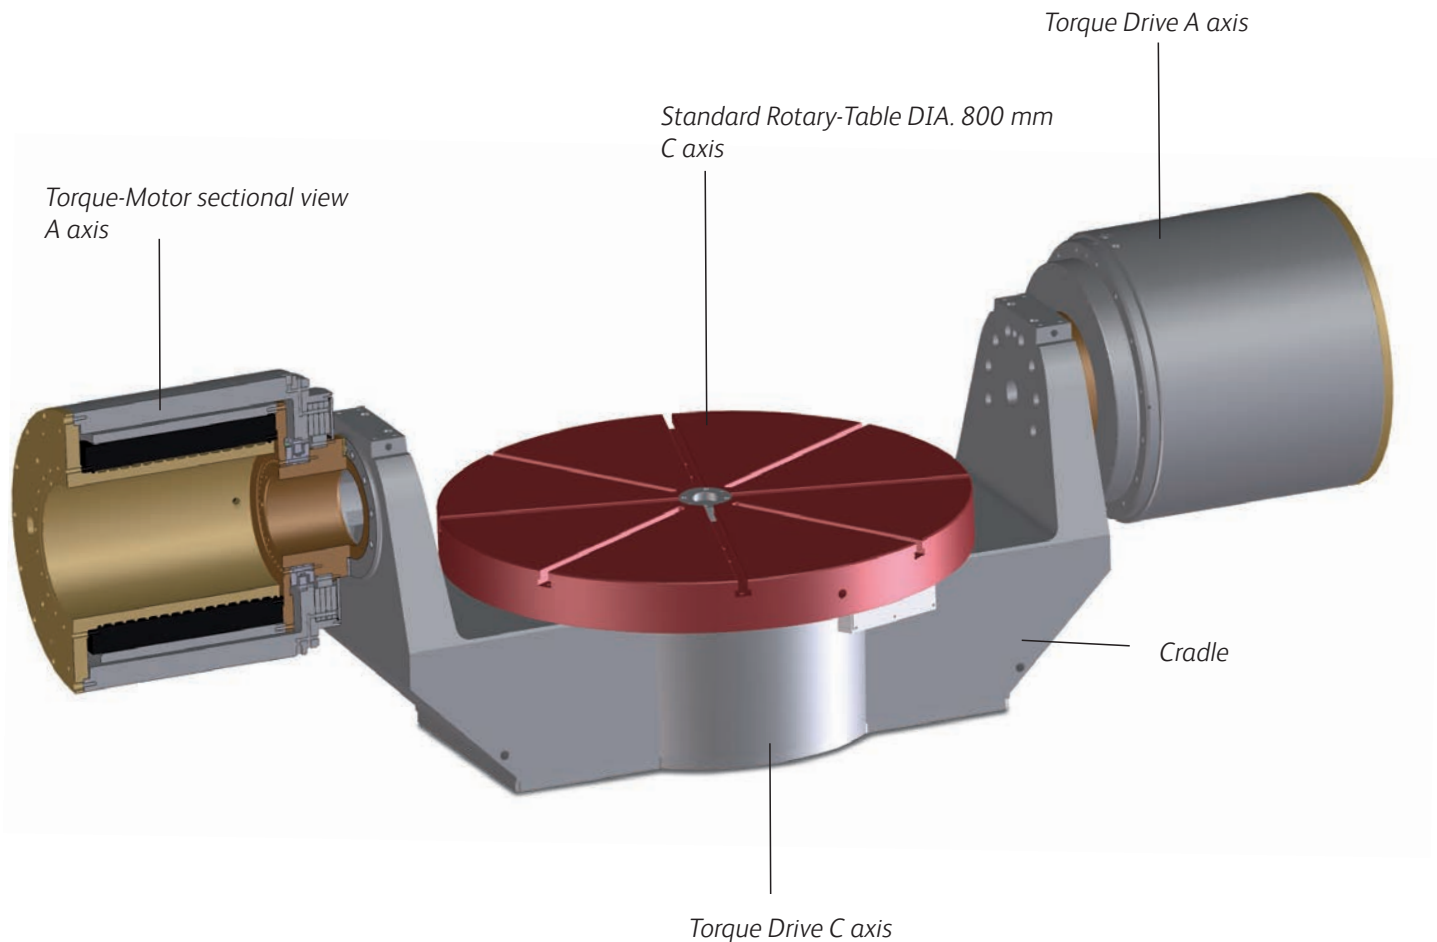

WORKPIECE DIMENSIONS - MACHINING SPACE

MACHINING SPACE

- Maximum utilization of Machining Space
- C axis DIA. 1380 mm
- A axis DIA. 1340 mm
- Maximum workpiece dimension: Spherical sector
Radius 690 mm up to 700 mm height
- Swivel range $\pm 140^\circ$
- Table load up to 3000 kg workpiece weight including
Clamping-Set-Up-Device
- Stainless steel inside covering [option]

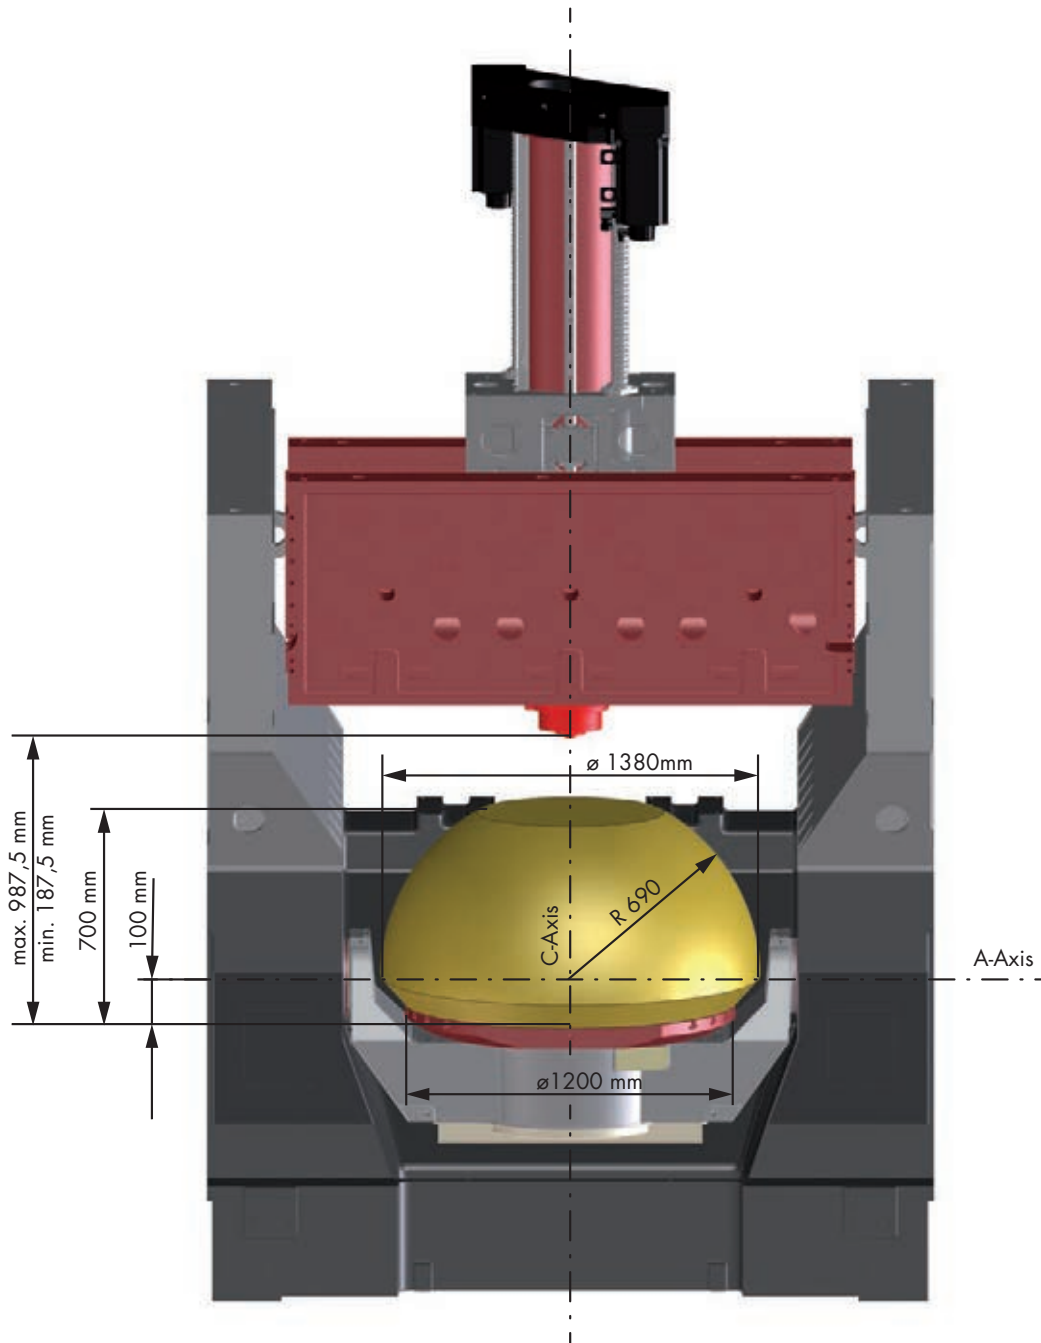


OPTIONS

NC-SWIVEL (A-AXIS) -AND ROTARY-TABLE (C-AXIS)


Rotary-Table C axis ^{1) 2)}

Clamping surface mm	ø 900	
T-slots acc. DIN 650	4 x 18 H7 and 4 x 18 H12	
Configuration	8 x 45 °	
C-Axis RPM max. min ⁻¹	100 ¹⁾	450 [560] ²⁾
Table Load max. kg	3000	

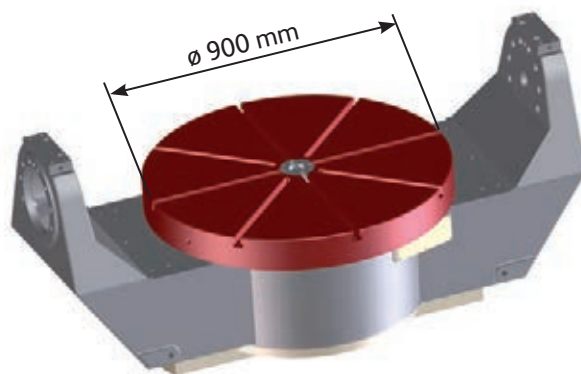


Rotary-Table C axis ^{1) 2)}

Clamping surface mm	ø 1000	
T-slots acc. DIN 650	4 x 18 H7 and 4 x 18 H12	
Configuration	8 x 45 °	
C-Axis RPM max. min ⁻¹	100 ¹⁾	450 [560] ²⁾
Table Load max. kg	3000	

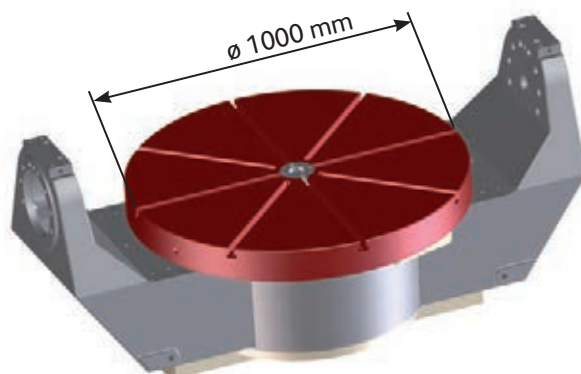


Rotary-Table C axis ^{1) 2)}

Clamping surface mm	ø 1200 x 1000	
T-slots acc. DIN 650	8 x 18 H12 and 1 x 18 H7	
Configuration	parallel	
C-Axis RPM max. min ⁻¹	100 ¹⁾	450 [560] ²⁾
Table Load max. kg	3000	

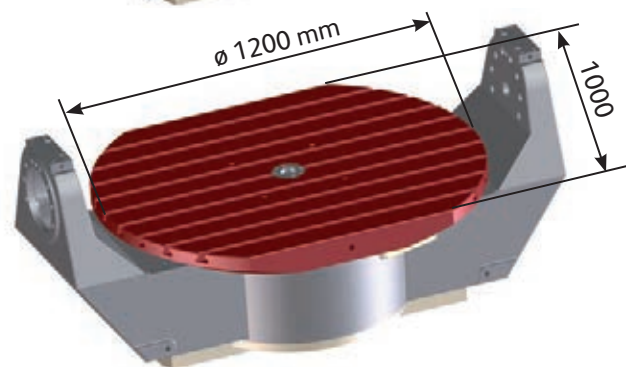

Rotary-Table C axis with NPS ^{1) 2) 3)}

Clamping surface mm	780 x 780 mm with NPS ³⁾	
T-slots acc. DIN 650	without	
Configuration NPS	4 x 90 °	
C-Axis RPM max. min ⁻¹	100 ¹⁾	450 [560] ²⁾
Table Load max. kg	3000	

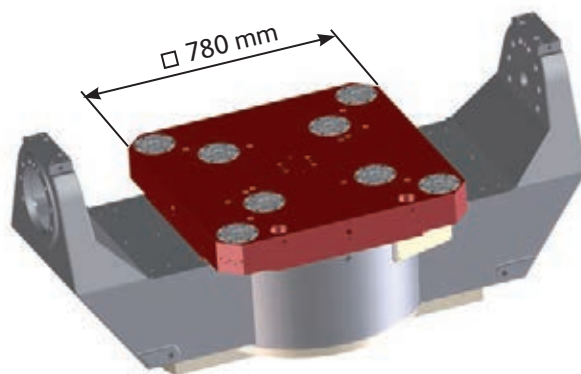

¹⁾ GS 1400/5-T

³⁾ NPS = Zero point clamping system

²⁾ GS 1400/5-FDT


Further designs on demand

GS 1400/3

3-AXIS-MACHINE WITH RIGID FIXED BASE TABLE

Rigid fixed base table

Clamping surface mm	1300 x 1400
T-slots acc. DIN 650	1 x 18 H7 / 13 x 18H12
Configuration	parallel
Distance T-slots	100 mm
Table Load max. kg	4000 kg

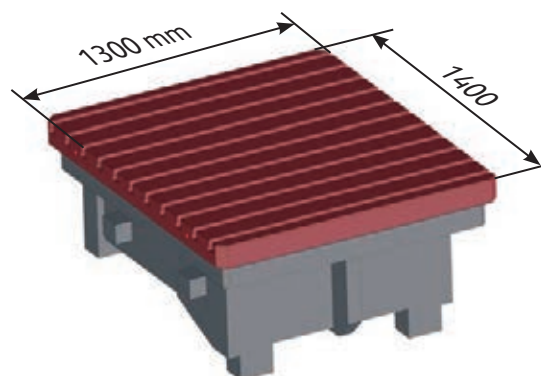

OPTIONS

CNC-CONTROLS

Heidenhain TNC 640 (standard)



CNC-CONTROLS

Siemens SINUMERIK 840 D sl



KINEMATIK GAUGING

Accuracy check and compensation

- KinematicsOpt., Heidenhain
- C 996, Siemens



ELECTRICAL HANDWHEELS

- HR 510, Heidenhain
- HR 520, Heidenhain
- Mini-Handwheel, Siemens



3D - TOUCH PROBES

INFRARED TRANSMISSION

- Heidenhain
- m&h Inprocess
- Renishaw
- Blum



MULTIPLE-MEDIA-COUPLING

Rotary Joint at C-Axis-Table, 4 channels,
air and/or fluids on selection



OPTIONS

TOOL SETTING SYSTEM

Brand:
m&h (without mech. Touch Trigger Probes)
Blum (with or without mech. Touch Trigger Probes)



CAMERA AND SCREEN

Camera mounted at Machining Space with transmission to external flat screen or Video-Server for process-set-ups and process-controls




TOOL-MAGAZINES

Twin magazine, 66 Tool positions, (Chain Magazine)
Single magazine, 75 Tool positions, (Chain Magazine)
Twin magazine, 150 Tool positions, (Chain Magazine)



TOOL-MAGAZINES

Rack-Type Magazines designed for 250 Tool Positions

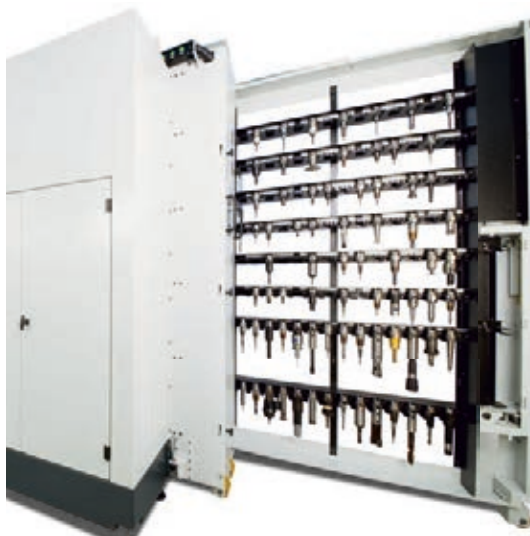

OPERATING SUPPLY UNIT SET'S

Bundle set's A, B, C cooling and cleaning circuit system up to 80 bar high pressure, on selection Scratch-Type or Hinge-Type-Conveyor



OPERATING SUPPLY UNIT SET'S

Coolant Cleaning Unit with Compact-Paper-Filter



OPTIONS

MIST EXTRACTION UNIT

Attached to Machine-Basic-Body




REMOTE DIAGNOSIS AND MAINTENANCE

and for NC-Programming-Support



MACHINING CENTER ACCEPTANCE

Workpiece according to ALZMETALL-Standard, on selection Customer-Workpiece (option)

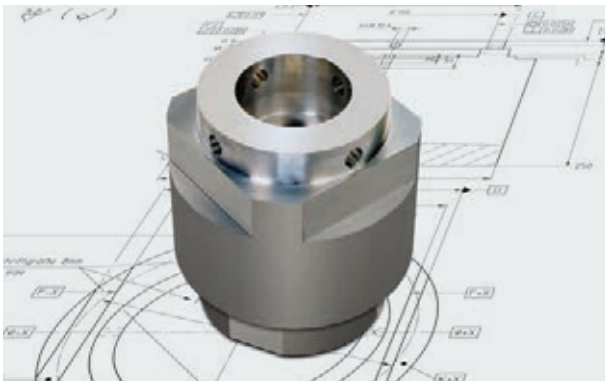

SERVICES

NC-Program-Training, Operator-Training for Heidenhain and Siemens

- Machining Center Installation and Commissioning
- Process development
- Production Assistance
- Service and Maintenance

MORE SERVICES

- Cutting-Tool Setting and Detection
- Mist Extraction Units ¹⁾
- Equipment for Graphite Machining
- Custom-Made Solutions

¹⁾ Optional placement along the right- or left side of the Machining Center



TECHNICAL DATA

Machine-Type	GS 1400/3	GS 1400/5-T	GS 1400/5-FDT
Working Range			
Traverse Path	1200/1300/800 mm		
Distance Spindle - Table min./max.	187,5/987,5 [203,5/1003,5] mm		
Rigid fixed base table			
Clamping Surface (w x d)	1300 x 1400 mm		
13 T-slots acc. DIN 650 at X-Direction	18H12 x 100 mm		
Alignment-Slot at Table Center Line	18H7		
Machine-Table Load	4000 kg		
NC-Swivel-and Rotary-Table			
Torque-Drives at Swivel- and Rotary-Axis	Direct-Drives		
Swivel Range of A-Axis	± 140 °		
Swivel Speed at A-Axis max.	30 rpm		
C-Axis Rotation	360 ° unlimited		
C-Axis RPM max.	100 rpm		450 [560] rpm
Diameter Machine-Table C-Axis	Ø 800 mm, [Ø 900 mm], [Ø 1000 mm], [Ø 1200 x 1000 mm]		
T-Slots acc. DIN 650	4x18 H12/ 4x18 H7 [1x18 H7/8x18 H12]		
Star-Shaped Configuration	8 x 45 ° [9 x parallel]		
Machine-Table Center Bore	Ø 50 H7 mm		
Table Load max.	3000 kg		
C-Axis Rotary-Diameter at A-Axis Center	Ø 1380 mm		
A-Axis Swivel Diameter (Swing) at X-Axis Center	Ø 1340 mm		
Distance A-Axis-Center to Rotary-Table	100 mm		
Feed-Drive-System X-, Y-, Z-Axis			
Digital AC-Servo-Motors, maintenance free			
Max. Rapid Travel X-, Y-, Z-Axis at TCP	85 m/min		
Feeding Force X-, Y-, Z-Axis at CDF 40%	16 kN		
Motor-Spindle-Drive			
High Frequency Motor-Spindle			
Cutting-Tool Interface	HSK-A100 [HSK-A63]		HSK-T100 [HSK-T63]
Motor-Spindle-Power at CDF 25 %	60 [72] [48] [30] [44] kW		60 [48] kW
Variable Speed Range max.	14.000 [10.000] [18.000][24.000] [30.000] min ⁻¹		14.000 [18.000] min ⁻¹
Motor-Spindle Torque at CDF 25 %	350 [508] [170] [96] [40] Nm		350 [170] Nm
Tool-Magazines			
Tool positions	33 [45] [63] [66] [75] [90] [126] [150] [224/250 Rack-Type-Magazines]		
Max. Tool Diameter, Chain fully loaded ¹⁾	125 [95] mm		
Max. Tool Diameter, Chain neighbour positions unloaded ¹⁾	250 [150] mm		
Max. Tool Length ¹⁾	425 [500] [530] [480] mm		
Max. Tool Weight ¹⁾	32 kg [10 kg]		
Tool-Change-Cycle (approx.)	9 s		
Chip-to-Chip Cycle (approx.)	11 s		
Linear Encoders X-, Y-, Z-Axis	Absolute Measuring, Incremental Measuring		
Positioning Scatter acc. VDI/DGQ 3441	≤ 0,007 mm [≤ 0,005 mm]		
Angle Encoder System A-, and C-Axis	Incremental Measuring		
Machine Weight excl. Options	31.300 kg	31.300 kg	
CNC-Controls	TNC 640 Heidenhain, [840 D sl Siemens]		


¹⁾ Chain magazines

[Option]

MOTOR - SPINDLES


RPM / POWER / TORQUE TRACK RECORD

RPM_{max.} = 14.000

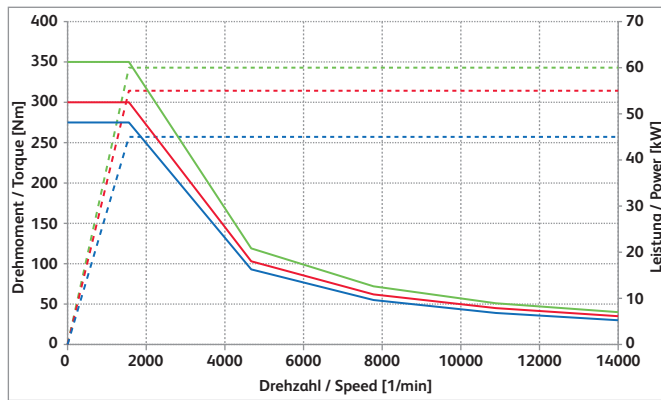


GS 1400/3, GS 1400/5-T

RPM_{max.} = 14.000 (Hirth-Gear-Indexing for turning operation)

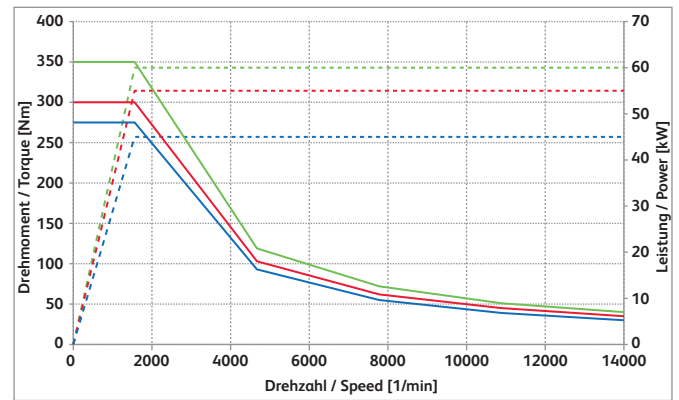


GS 1400/5-FDT

[RPM_{max.} = 18.000] Option

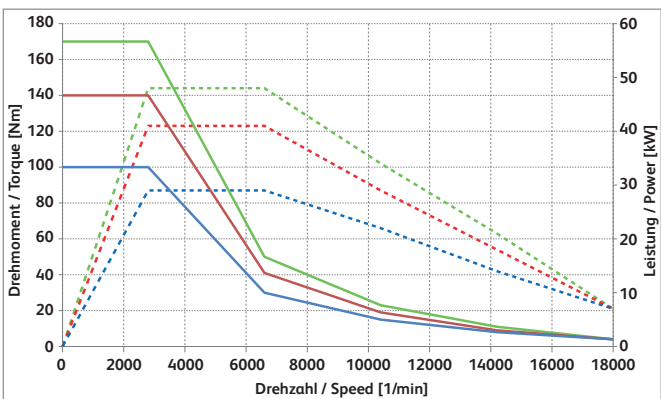


GS 1400/3, GS 1400/5-T, GS 1400/5-FDT

[RPM_{max.} = 24.000] Option

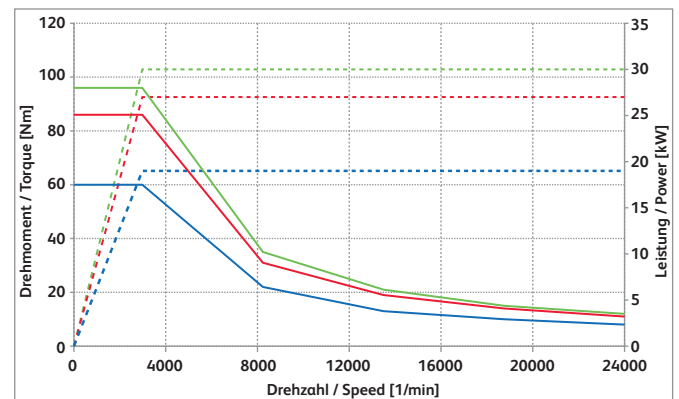


GS 1400/3, GS 1400/5-T

[RPM_{max.} = 30.000] Option

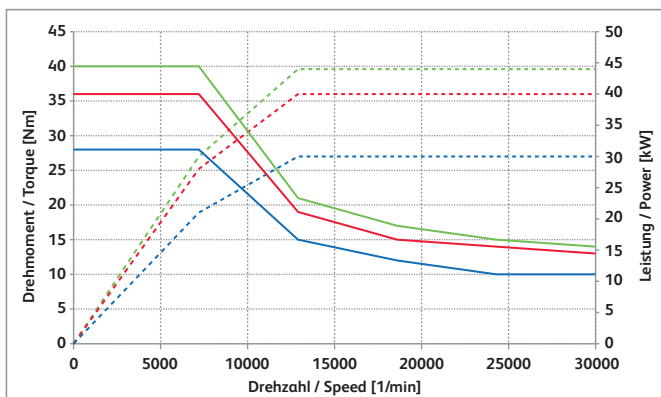

GS 1400/3, GS 1400/5-T

[RPM_{max.} = 10.000] Option

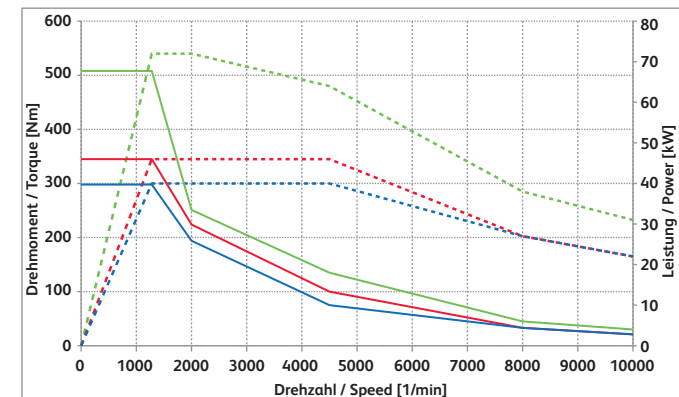




GS 1400/3, GS 1400/5-T

Legend

- Torque S1 [Nm]
- Torque S6 40% [Nm]
- Torque S6 25% [Nm]

- - - Power S1 [kW]
- - - Power S6 40% [kW]
- - - Power S6 25% [kW]

MACHINING CENTER DIMENSIONS

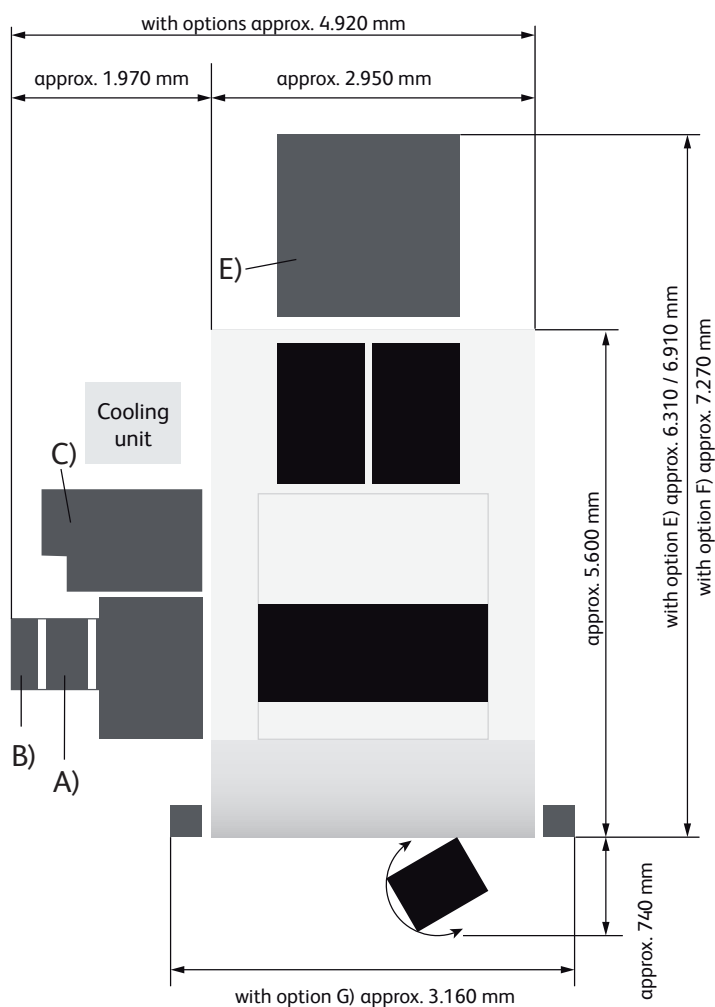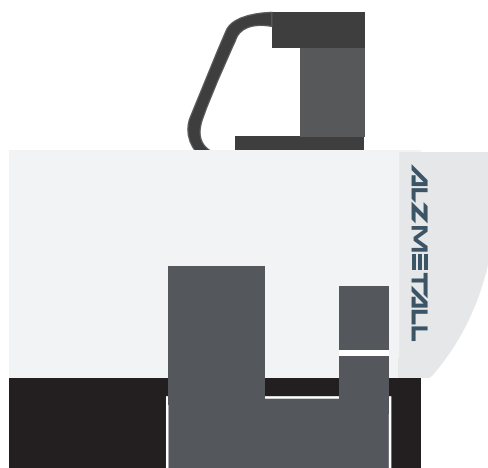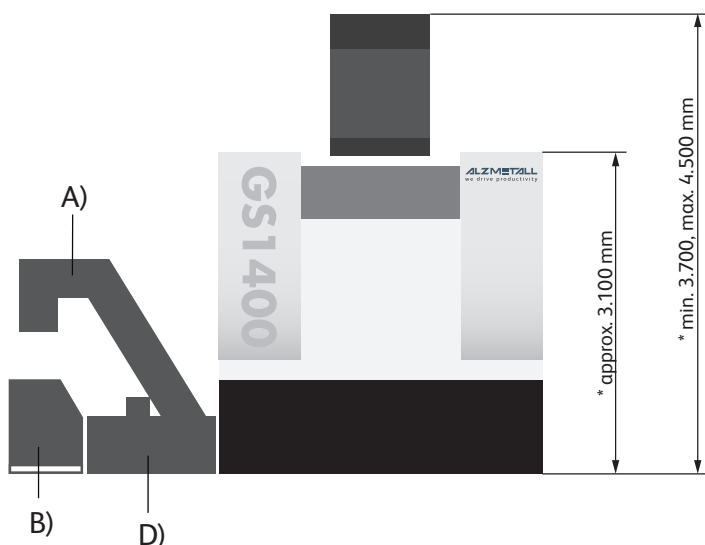

OPTIONS


- A) Chip Conveyor
- B) Chip Trolley
- C) Mist Extraction Unit
- D) High pressure Coolant Unit
- E) Tool-Magazine 126 / 150 (HSK 63)
- F) Tool-Magazine 126 (HSK 100)
- G) Enlarged door opening

Please observe: Options A, B, C and D are either to be installed along the right- or left side of the Machining Center.

The coolant unit can be placed variable.

Please see machine layout for detailed information.


* incl. Precision levelling elements

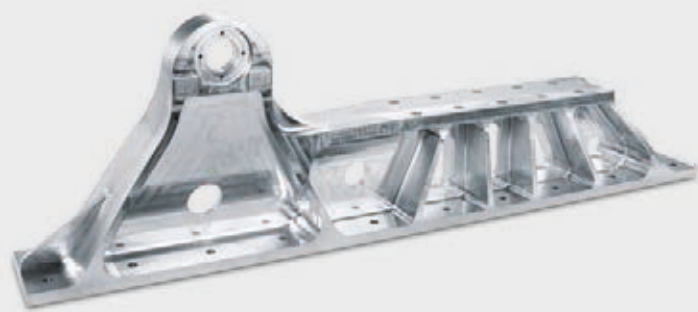

AUTOMATION SOLUTIONS



ALZMETALL GS 600/5-T and WU-robot cell RZ-3/20 implementation for specific part handling. Transfer weight of 20 kg dependent on inserted gripper.

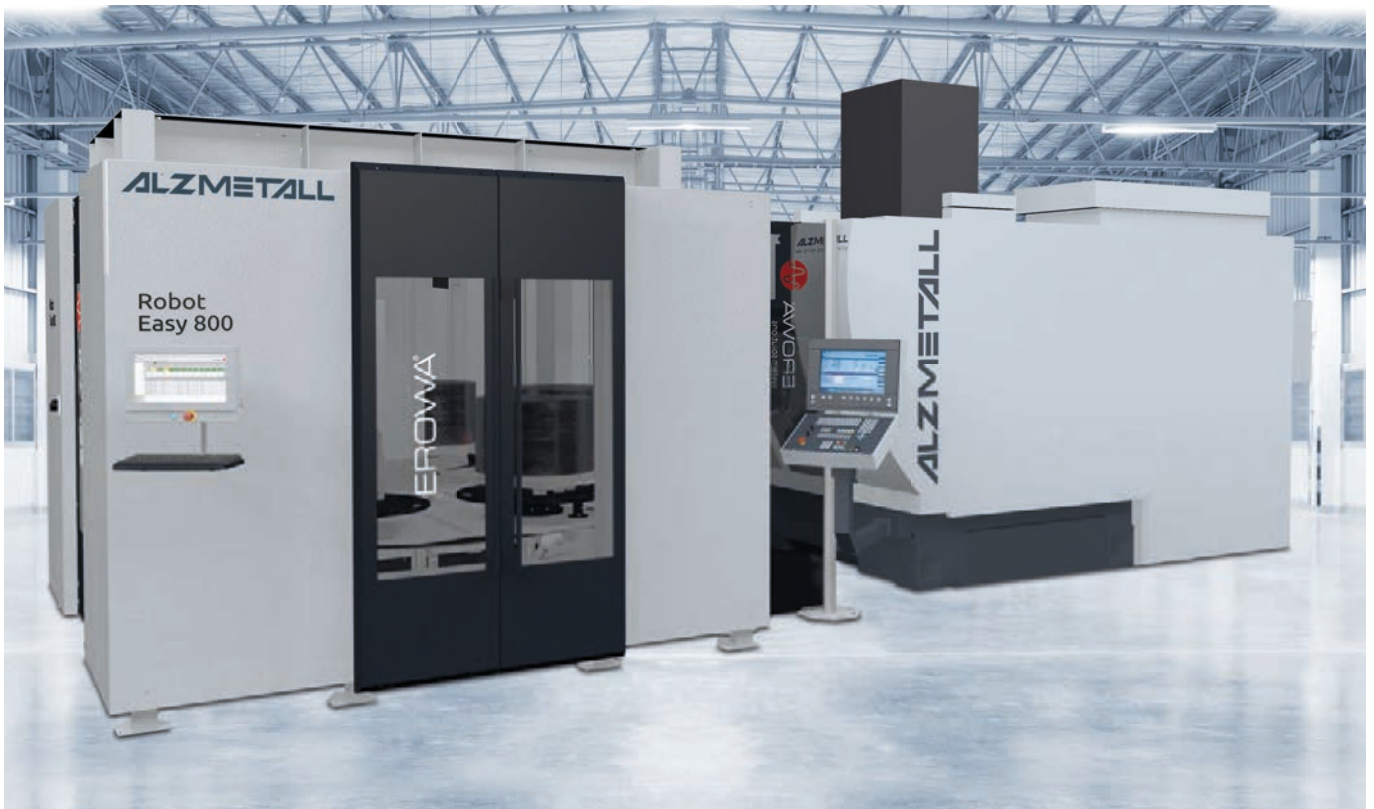


Automation solution ALZMETALL GS 1000 and EROWA ERE800 implemented for workpiece dimension \varnothing 850 x 1000 mm. Transfer weight max. 800 kg, 6-12 Magazine-Positions, 6,4 metric tons Magazine capacity.

AUTOMATION SOLUTIONS



ALZMETALL GS 1000 and INDUMATIK Ultralight 300 implementation. Transfer weight of max. 300 kg, 3-12 pallet positions for pallets 320 x 320 mm up to 630 x 630 mm. Transfer carrier drive for operator access.

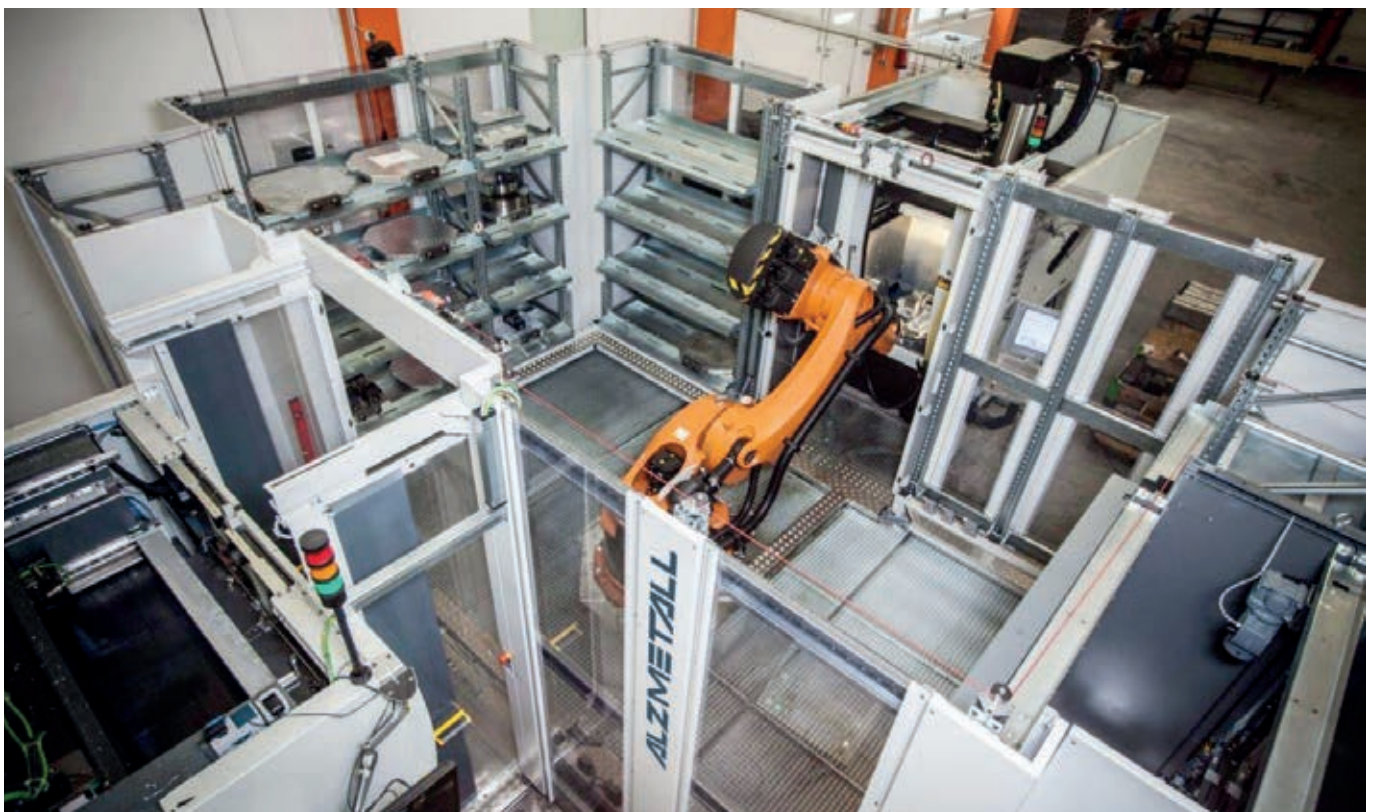

Flexible manufacturing cell with ALZMETALL GS 1000 and GS 800. Transfer weight of max. 400 kg, 28 work piece pallets for two pallet dimensions 470 x 470 mm and 700 x 700 mm.

PRODUCT RANGE - PLEASE CONTACT US



Machining Centers

- GS 600E/3
- GS 600E/5
- GS 600/5-T
- GS 600/5-FDT



Machining Centers

- GS 800/3
- GS 800/5-T
- GS 800/5-FDT



Machining Centers

- GS 1000/3
- GS 1000/5
- GS 1000/5-T
- GS 1000/5-FDT
- GX 1000/5-AF
- GX 1000/5-LOB



Machining Centers

- GS 1200/3
- GS 1200/5-T
- GS 1200/5-FDT

We gladly inform you also about ALZMETALL Column Drilling machines and Foundry engineering.



ALZMETALL GmbH & Co. KG

Postfach/P.O. Box 1169
 D-83350 Altenmarkt/Alz · Germany
 Harald-Friedrich-Straße 2-8
 D-83352 Altenmarkt/Alz · Germany
 Tel./Phone +49 86 21 88-0
 Fax +49 86 21 88-213
 E-Mail: info@alzmetall.com
www.alzmetall.com